

Cossonay station

Cossonay / Canton of Vaud / Switzerland

Ballast bonding




View of the platform

Description of the project

As part of the project in Cossonay, various renovation and renewal works on the platforms were carried out.

In order to set up the platform safely and quickly, a ballast bonding was performed on the secondary track.

This allowed the secondary track to remain in service for the construction traffic and the platform to be renovated and renewed quickly and safely.

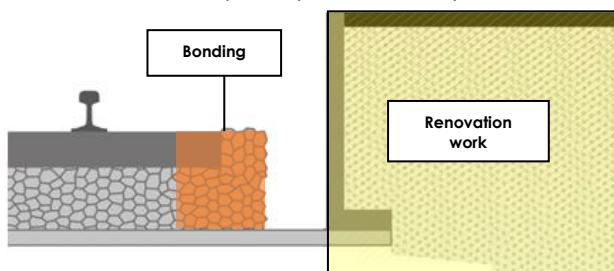

Contracting authority

Swiss federal Railways
Rue de la Gare de Triage 7
1020 Renens
Mr. Florian Lovato

Application date

November 2021

Key elements of the project:

Application length
259 m

Application width
20 cm

Application depth
45 cm – 55 cm

Total quantity applied
530 litres

Work duration
3 hours

