

Mendrisio - Balerna

Mendrisio / Canton of Tessin / Switzerland

Ballast bonding




View of the bonding ballast system with trailer

Project description

As part of the project in Mendrisio, various rehabilitation works and ballast cleaning were carried out.

In order to renovate the track and to clean the ballast, a ballast bonding was realized on the neighbouring track.

The secondary track could thus remain in operation on the very busy line and the other track could be safely renovated and the ballast cleaned.

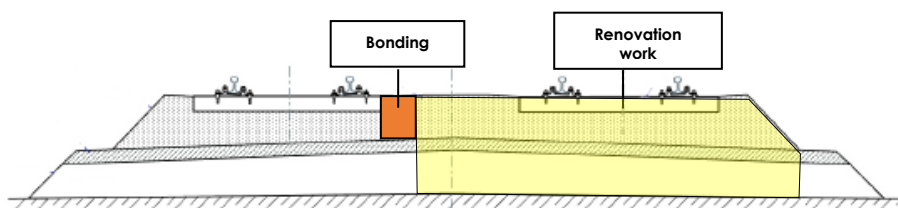

Contracting authority

Swiss Federal Railways
Via Pedemonte 7
6500 Bellinzona
Mr. Matteo Maglione

Application date

July - August 2021

Key elements of the project:

Length of the application
1348 m¹

Width of the application
30 cm - 55 cm

Depth of the application
60 cm - 75 cm

Total quantity applied
6609 Litres

Working hours
9 hours

